

Safety valve DN20

P/N STV-SO20

DT-STV-SO20E Rev 1.1
Effective: July 2019

FEATURES

- For using with SFS FM-200 system and SNS IG-100 system
- Safety discharge pressure for cylinder manifold

DESCRIPTION

This device is used in cylinder systems that will be installed with selector valves only. In case of an accidental discharge of the extinguishing agent, this will be blocked in the manifold until the bursting disc of this valve detect an over-pressure and permits a controlled vent of the gas outside.

The bursting disc is assembled in factory with the appropriate torque for its possible activation.


Its recommendable that the pressure discharge the gas to the atmosphere or more larger area.

INSTALLATION

These are security mechanism to avoid that an over pressure in the manifold can occur when we have selector valves installed at the end of the manifold which does not permit the correct discharging of the extinguishing agent.

SPECIFICATION


Body Material	Brass C3604
Size	DN20 (3/4")
Working pressure	80 bar
Weight	0.12kg (0.26lbs)

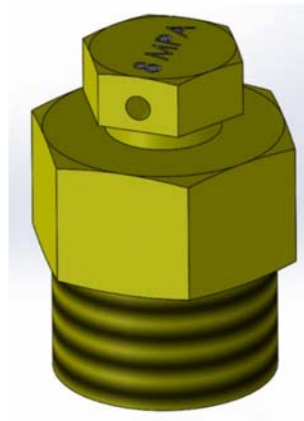

ORDERING INFORMATION

The part number for ordering safety valve DN20 is STV-SO20

DIMENSIONS

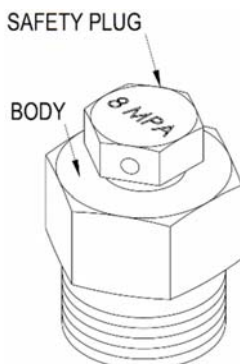

This literature is provided for informational purposes only. S-TECVINA Ltd., assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact S-TECVINA Ltd.,

FM-200 is a registered trademark of The Chemours Company FC, LLC. 1007 Market Street Wilmington, DE19899 United States of America (USA)

S-TECVINA Ltd.,
Dong Van IV IZ, Ha Nam, Vietnam
Phone: (+084) 0226 2460 114
www.stecvina.com